


REFRIGERATED BARLINE - WITHOUT BACK SPLASH

- Blower System
- Without Backsplash
- Heated Glass




B2D/C5/7-S
B2D/C6/7-S

2 Door




Top View




Front View

B3D/C7/7-S

3 Door

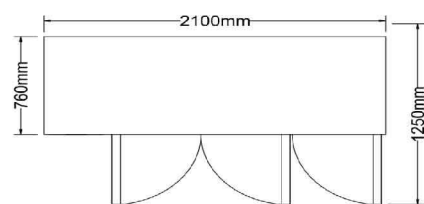


Top View

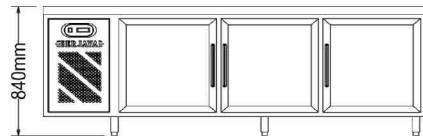


Front View

B4D/C8/7-S

4 Door

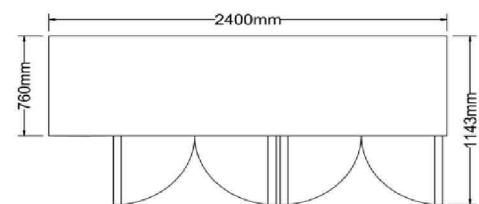

Top View

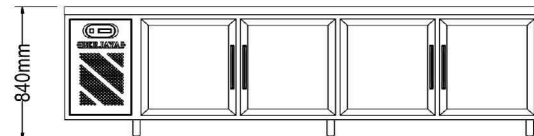

Front View

HIGHLIGHTS

Specifically design for
beverage storage and display.

Brilliant illumination of products
creates impulse sales.

High-density Cyclo-isopentane Polyurethane
insulated body saves energy.

Automatic defrost system
saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion
by urethane-treated evaporator coil.

Blower system (assisted with fan)
will ensure homogenous coolness in the storage space.

Magnetic and Heated Glass Door.

Environmentally friendly refrigerant
(CFC and HCFC Free) R134a.

Effective counter - balanced weight system self
closing door provides smooth, even, positive closure.

127 ~ 152mm adjustable stainless steel legs
or 100mm castor wheel.

2 tier removable and adjustable shelves.

Tested at ambient temperature of 32°C,
with no load.

TABLE INFO

MEPS
Australia

	2 DOOR	2 DOOR	3 DOOR	4 DOOR
MODEL	B2D/C5/7-S	B2D/C6/7-S	B3D/C7/7-S	B4D/C8/7-S
Temperature°C (celsius)	+2 to +8	+2 to +8	+2 to +8	+2 to +8
External Dimension (mm)	1500 x (760+50) x 840	1800 x (760+50) x 840	2100 x (760+50) x 840	2400 x (760+50) x 840
Internal Dimension (mm)	1051 x 584 x 597	1353 x 584 x 597	1651 x 584 x 597	1953 x 584 x 597
Gross Volume (Litres)	337	437	545	648
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	107	117	143	158
Cooling Capacity (W)	522	522	646	792
Wattage (W)	570 - 630	570 - 630	665 - 735	713 - 787
Ampere (A)	3.8 - 4.2	3.8 - 4.2	4.3 - 4.7	4.6 - 5.0
Energy Consumption (kw/ 24h)	3.8 - 4.2	5.1 - 5.7	7.4 - 8.2	10.4 - 11.4
Refrigerant/ Grams	R134a / 340g	R134a / 360g	R134a / 360g	R134a / 370g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital
Shelves (PVC)	4	4	6	8
Number Of Clips	16	16	24	32
Unit For 20ft Container	20	14	14	8
Unit For 40ft Container	42	28	28	16

*Note:-
Option : CW - Castor Wheel / BF - Bullet Feet

As product improvement is an on going process, we reserve the right to change specifications or design without notice.