


**MFS-100**

**MFS-140**

**MFS-100-C**

**MFS-140-C**

Cubetas GN y NO incluidas en el precio, ver página 387  
 GN containers NOT included in price, see page 387

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	perfiles GN GN supports	estantes shelves	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
<b>MFS-100</b>	0°C +8°C	915	890	700	4	2	2	169	230V-50Hz	R134a* R290	304 502	322 764
MFS-140	0°C +8°C	1365	890	700	7	3	3	264	230V-50Hz	R134a* R290	485 820	511 614
MFS-100-C	0°C +8°C	915	890	700	4	2	2	169	230V-50Hz	R134a* R290	304 502	322 764
MFS-140-C	0°C +8°C	1365	890	700	7	3	3	264	230V-50Hz	R134a* R290	485 820	511 614

\*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- **MFS-C** cúpula acristalada sobre alojamiento cubetas
- **MFS** cubierta inox abatible sobre alojamiento cubetas
- Exterior en acero inox AISI-304
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Encimera inox con tabla de polietileno color blanco, deslizante para incrementar superficie de trabajo (otro color, consultar)
- Capacidad cubetas GN en la encimera (ver detalle)
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 95 - 135 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

- **MFS-C** glass cover
- **MFS** hinged lid
- AISI-304 stainless steel exterior
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI-304 stainless steel worktop, with white polyethylene table, sliding to increase work surface (for other color, consult)
- GN containers capacity in the worktop (see detail)
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI-304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 32°C ambient

OPCIONES	OPTIONS
parrilla adicional GN 1/1	GN 1/1 extra shelf
set adicional guías GN 1/1	GN 1/1 slides extra set
cajonera doble inox, auto-cierre	double drawers set, self-closing
cerradura puerta inox	solid door lock
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
cambio R290 por R134a	R290 to R134a

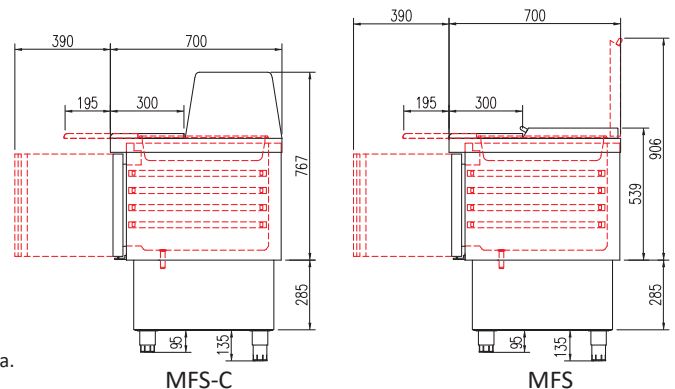

Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.  
 Worktops, container fits and covers, can be customized.

# Mesa fría SALADETTE GN1/1 encimera abierta Open worktop GN 1/1 SALADETTE counter

2

all photos must be considered as a reference - fotografías no contractuales

evaporador central  
double fan evaporator



encimera deslizante  
polietileno  
polyethylene sliding  
worktop

GN 1/1 - 100

MFS-100-C  
con cajones (opcional)  
with drawers (option)


encimera deslizante  
polietileno  
polyethylene sliding  
worktop

MFS-100  
con polietileno color rojo  
with red polyethylene




MFS-100

MFS-100 / MFS-100-C



max profundidad: 100 mm - 200 mm  
100 mm - 200 mm max depth

MFS-140 / MFS-140-C

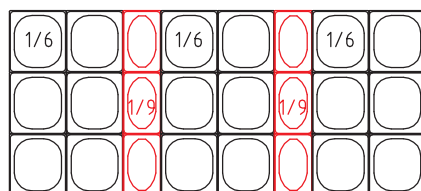

max profundidad: 100 mm - 200 mm  
100 mm - 200 mm max depth



MFS-140