

700

700 Pizza




Characteristics




- A Refrigeration unit**
Sparblock plug-in - monobloc ventilated system
- B Evaporator**
Treated by cataphoresis, 316L stainless steel coil
- C Controllore**
Capacitative touch
- D Door**
Self-closing 110° opening, removable double chamber magnetic gasket
- E Insulation thickness**
60mm - HFO polyurethane (no CFC, no HCFC)
- J Floor support**
Stainless steel feet, galvanised steel bottom panel

- K Rounded corners/removable parts**
For easy cleaning
- M Rack pitch**
Adjustable

Technical drawing and set-up

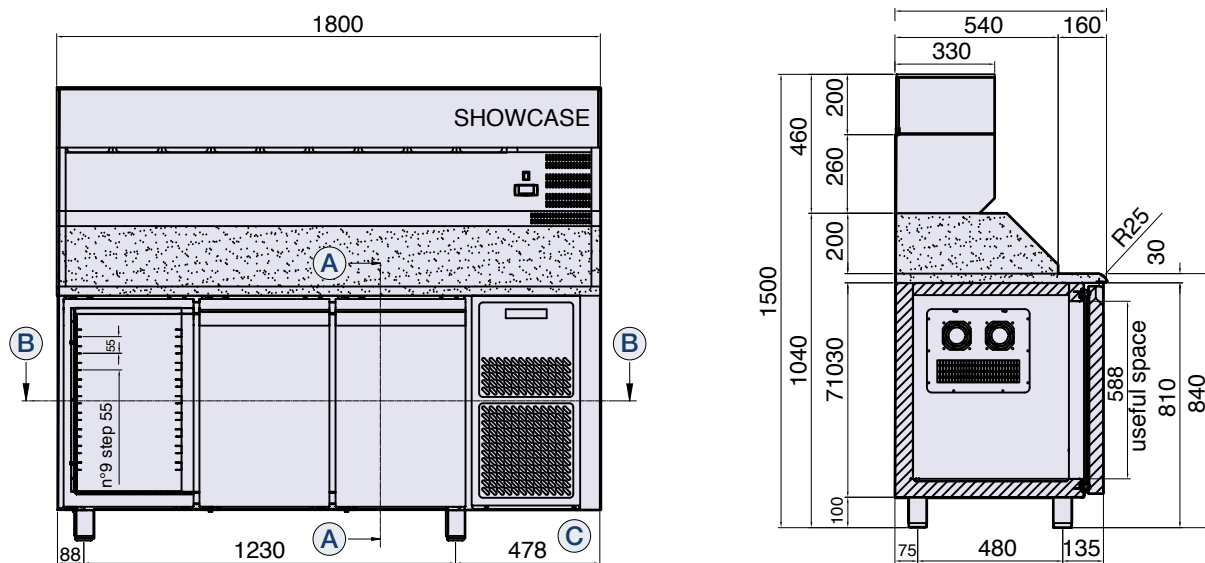


A-A

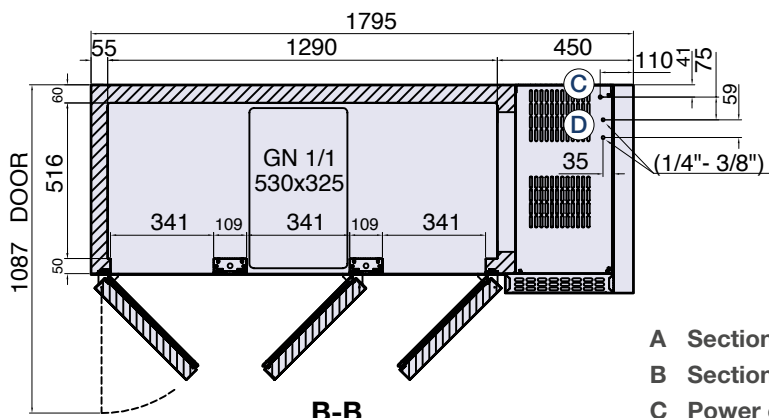




B-B

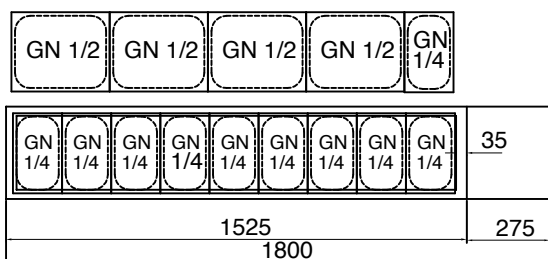- A Section plane**
- B Section plane**
- C Power cable outlet (length 2 m)**
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- D Gas pipes outlet**
Prepared for remote motor



Technical specifications

Temperature (°C)	
Model	BPCP70314XX
Doors	
Dimensions (mm) L x D x H	1800 x 700 x 1550-1600
Packaging (mm) L x D x H	1900 x 800 x 1870
Refrigerant	
Absorption (W)	318
Voltage (V-Hz)	230-1 50/60Hz
Net weight (kg)	320
Gross weight (kg)	387
Showcase	GN1/4
Capacity (l)	460

Available optionals

- Internal light
- Galvanised wheel kit
- Cable with non-standard plug
- Condensate evaporation electrical kit

