


GN 1/1

600x400 STANDARD






Characteristics

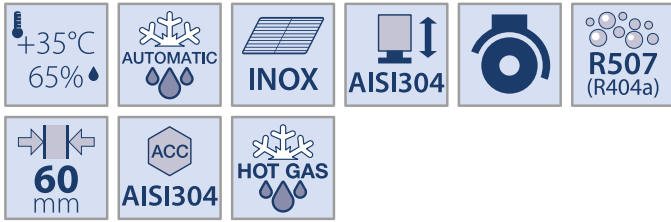


- A Refrigeration unit**
Sparblock plug-in - monobloc ventilated system
- B Evaporator**
Treated by cataphoresis, 316L stainless steel coil
- D Door**
Reversible right/left opening, self-closing 110° opening, removable double chamber magnetic gasket
- E Insulation thickness**
60mm - HFO polyurethane (no CFC, no HCFC)
- F Internal finish**
AISI 304 stainless steel
- J Floor support**
Stainless steel feet, galvanised external bottom panel

- M Rack pitch**
Adjustable

Technical drawing and set-up

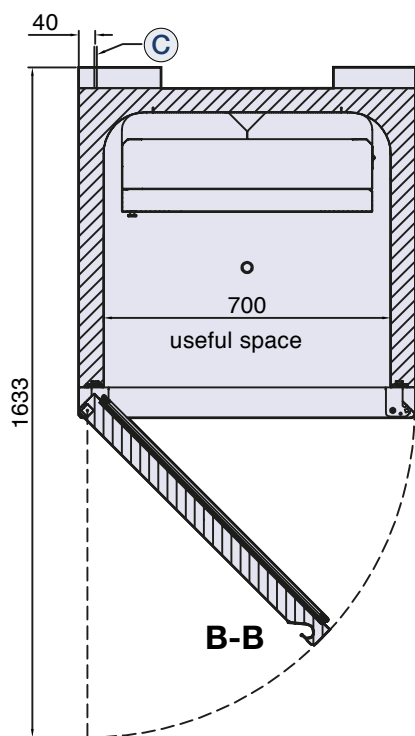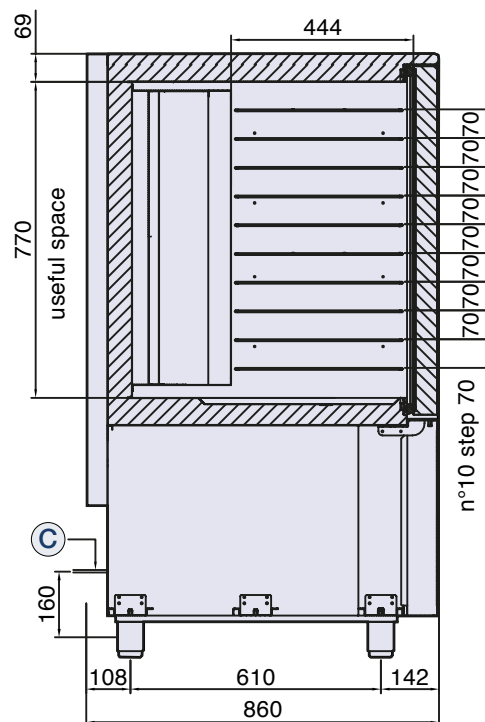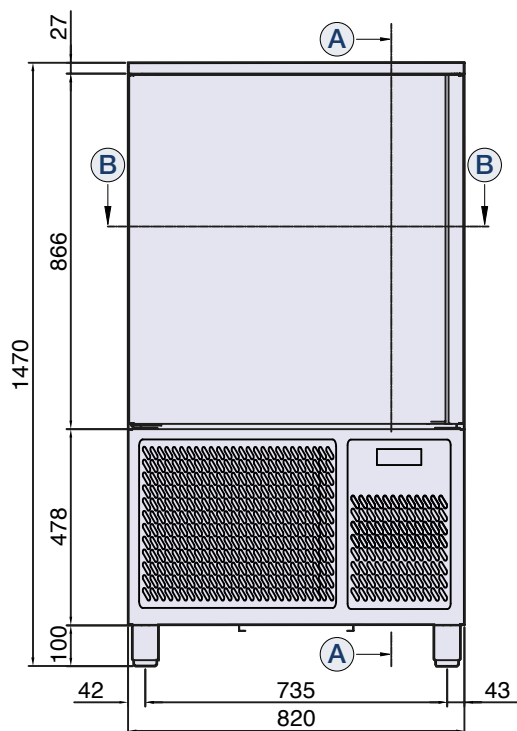

- A Section plane**
- B Section plane**
- C Power cable outlet (length 2 m)**
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- D Minimum distances**
WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 50 cm.

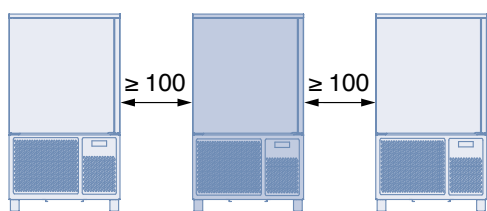

Technical specifications

Model	PBCN101164+70XX	PBCN101164+90XX
Dimensions (mm) L x D x H	820 x 860 x 1470	820 x 860 x 1470
Packaging (mm) L x D x H	850 x 900 x 1625	850 x 900 x 1625
Absorption (W)	1750	2200
Voltage (V-Hz)	400-3 50Hz 440-3 60Hz	400-3 50Hz 440-3 60Hz
Net weight (kg)	175	175
Gross weight (kg)	187	187
Rapid chilling performance	40 Kg +70°/+3°	40 Kg +90°/+3°
Freezing performance	25 Kg +70°/-18°	25 Kg +90°/-18°
Performance (W)	3730/1587	5450/2124
Load capacity of the trays	10 tray GN1/1 10 grids 600x400	10 tray GN1/1 10 grids 600x400

