

# 700 PLUS 700 litri MEAT



## Characteristics



### A Refrigeration unit

Sparblock plug-in - monobloc ventilated system

### B Evaporator

Treated by cataphoresis, 316L stainless steel coil

### C Controllore

Capacitive touch screen

### D Door

Thickness 60mm, reversible right/left opening, self-closing 110° opening, removable double chamber magnetic gasket

### E Insulation thickness

60mm - HFO polyurethane (no CFC, no HCFC)

### G External finish

Protected stainless steel, galvanized back panel and top panel

### J Floor support

Stainless steel feet, galvanized external bottom panel

### K Rounded corners/removable parts

For easy cleaning




### N Lighting

Standard

### R Lock


con chiave di serie

# Technical drawing and set-up

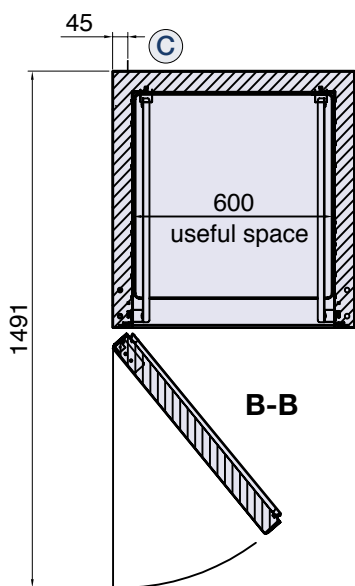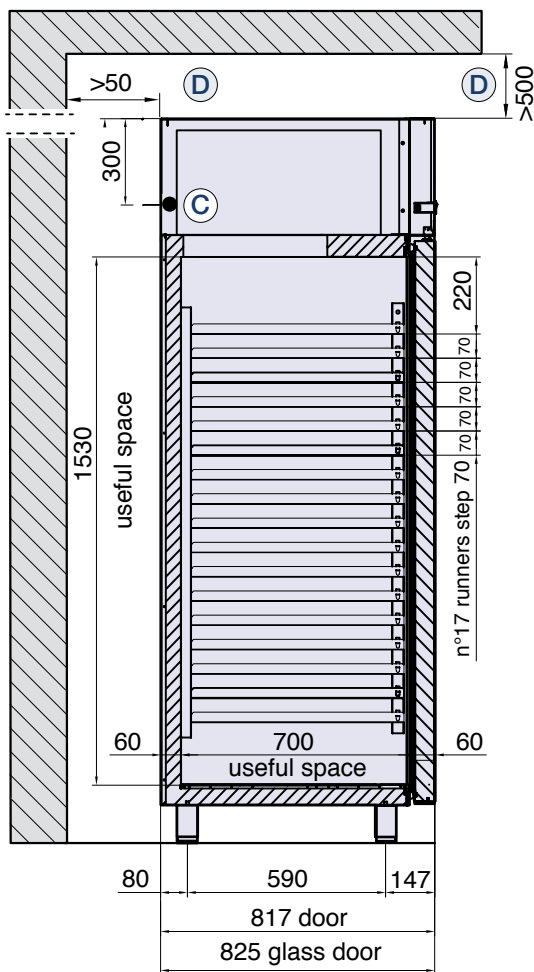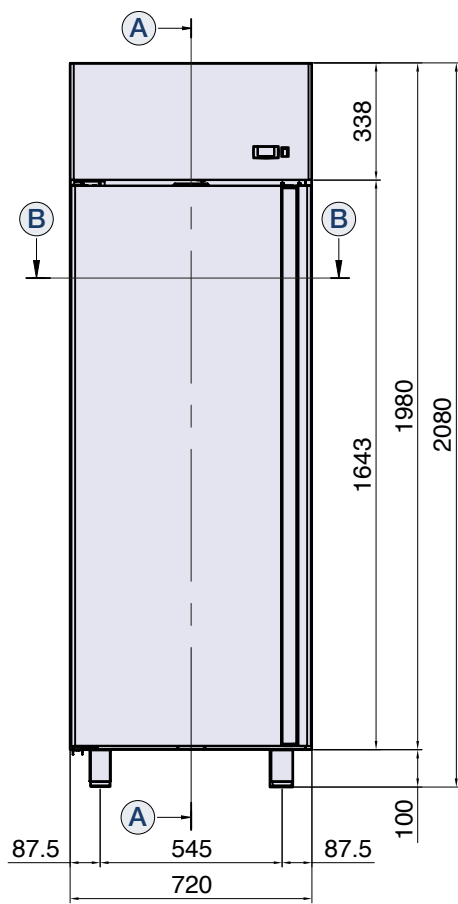

**A-A**

- A Section plane**
- B Section plane**
- C Power cable outlet (length 2 m)**  
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- D Minimum distances**  
WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 50 cm.

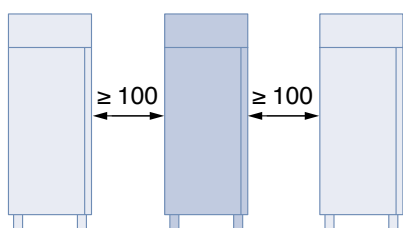

# Technical specifications

<b>Temperature (°C)</b>	 -2/+10
<b>Model</b>	PPCC070T2MEXX
<b>Doors</b>	
<b>Dimensions (mm)</b> L x D x H	720 x 815 x 2080
<b>Packaging (mm)</b> L x D x H	750 x 860 x 2240
<b>Refrigerant</b>	 R134a
<b>Absorption (W)</b>	410
<b>Voltage (V-Hz)</b>	230-1 50/60Hz
<b>Net weight (kg)</b>	117
<b>Gross weight (kg)</b>	131
<b>Number of trays</b>	2

