

# 700 PLUS 700 litres



## Characteristics



### A Refrigeration unit

Sparblock plug-in - monobloc ventilated system

### B Evaporator

Treated by cataphoresis, 316L stainless steel coil

### C Controllore

Capacitive touch screen

### D Door

Reversible right/left opening, self-closing 110° opening

### E Insulation thickness

60mm - HFO polyurethane (no CFC, no HCFC)

### F Internal finish

AISI 304 stainless steel

### G External finish

Protected stainless steel, galvanized back panel and top panel

### J Floor support

Stainless steel feet, galvanised external bottom panel

### K Rounded corners/removable parts

For easy cleaning




### N Lighting

Standard

### R Lock

con chiave di serie

# Technical drawing and set-up

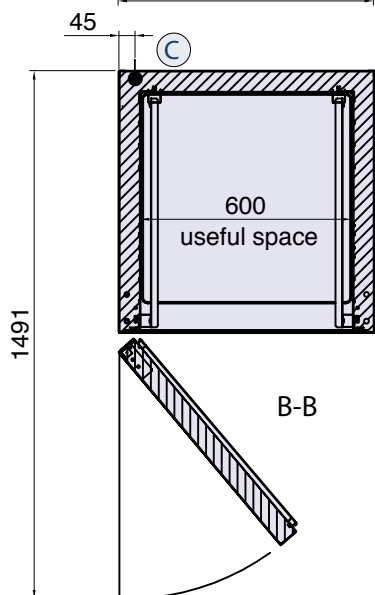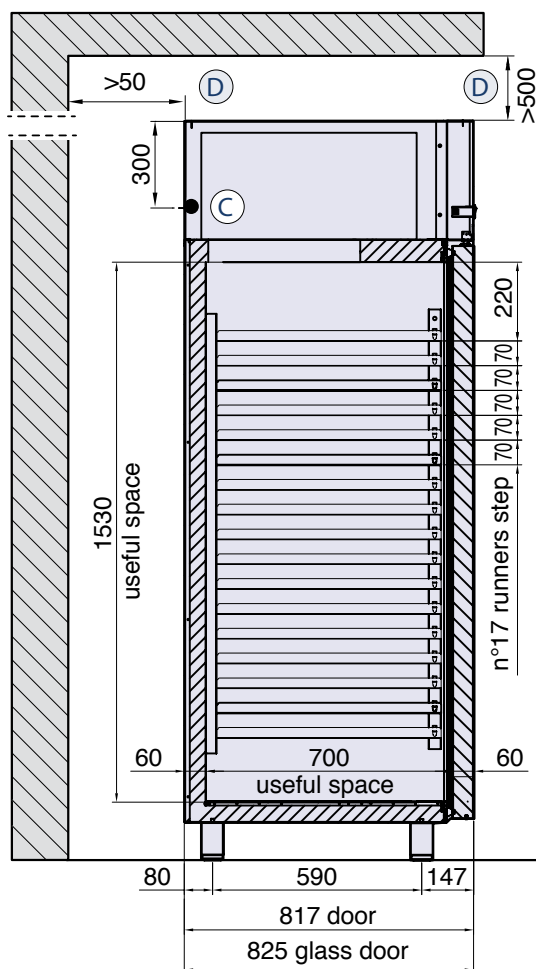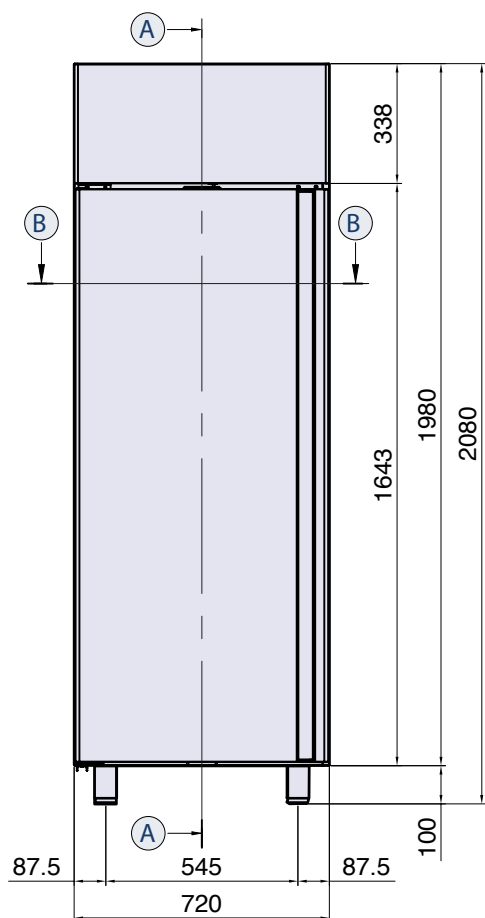

**A Section plane**


**B Section plane**

**C Power cable outlet (length 2 m)**







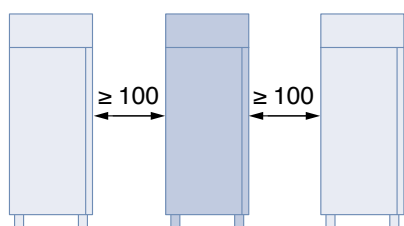








WARNING! While installing, have a qualified electrician connect it to an electrical panel.

**D Minimum distances**

WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 50 cm.



# Technical specifications

| Temperature (°C)                    |  0/+10 |  -2/+10 |  -18/-22         |  0/+10 |  -18/-22         |
|-------------------------------------|---|--|---|---|---|
| <b>Model</b>                        | PPCC070TNGLXX   | PPCC070T2GLXX  | PPCC070BTGLXX   | PPCC070TNMRGLXX   | PPCC070BTMRGLXX   |
| <b>Doors</b>                        |        |         |                  |        |                  |
| <b>Dimensions (mm)</b><br>L x D x H | 720 x 825 x 2080  | 720 x 825 x 2080   | 720 x 825 x 2080  | 720 x 825 x 2080  | 720 x 825 x 2080  |
| <b>Packaging (mm)</b><br>L x D x H  | 750 x 860 x 2240  | 750 x 860 x 2240   | 750 x 860 x 2240  | 750 x 860 x 2240  | 750 x 860 x 2240  |
| <b>Refrigerant</b>                  |  R134a |  R134a  |  R507<br>(R404a) |  R134a |  R507<br>(R404a) |
| <b>Absorption (W)</b>               | 410   | 410  | 580   | 30  | 30  |
| <b>Voltage (V-Hz)</b>               | 230-1 50/60Hz   | 230-1 50/60Hz  | 230-1 50Hz   230-1 60Hz   | 230-1 50/60Hz   | 230-1 50/60Hz   |
| <b>Net weight (kg)</b>              | 121   | 121  | 133   | 108   | 113   |
| <b>Gross weight (kg)</b>            | 135   | 135  | 147   | 122   | 127   |
| <b>Number of trays</b>              | 3   | 3  | 3   | 3   | 3   |

