



CGRE-751-SPF



CGRE-1002-SPF

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 2/1	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase climate 2015/1094 EN16825
CGRE-751-SPF	-2°C +8°C	660	2130	850	3	3	645	230V-50Hz	R134a*	245	264	4 30°C 55%
									R290	502	260	4 30°C 55%
CGRE-1002-SPF	-2°C +8°C	1350	2130	850	6	6	1282	230V-50Hz	R134a*	485	461	4 30°C 55%
									R290	845	396	4 30°C 55%

*opcional - optional

características técnicas y constructivas sujetas a variación sin previo aviso


we reserve the right to change specifications without prior notice

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, doble cristal, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Luz interior LED
- Estantes interiores GN2/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: 32°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Removable control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating ambient temperature 32°C

S-LINE

OPCIONES	OPTIONS
parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
cambio R290 por R134a	R290 to R134a

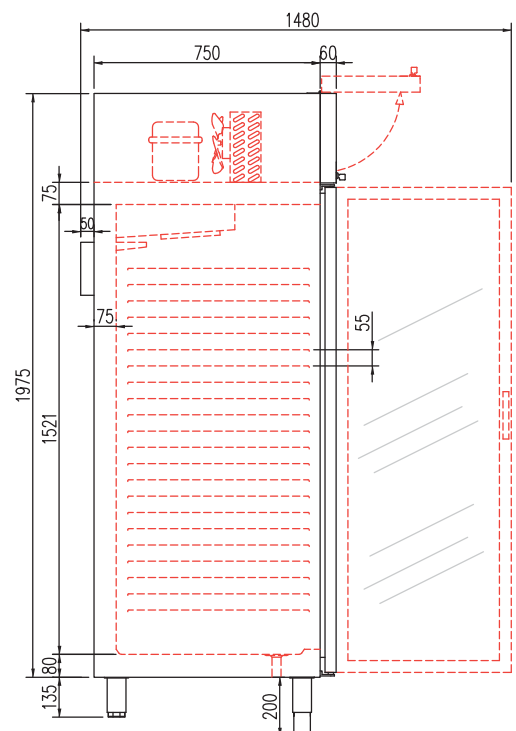

all photos must be considered as a reference - fotografías no contractuales



CGRE-751-SPF



CGRE-1002-SPF